

# EEZ PRODUCTS

## GEAR OILS AGMA EP 2 - 8A

For More Info, Visit..

[EEZProducts.com](http://EEZProducts.com)

*Foamy Cutting Fluid  
Tuf Tap 2-15-T  
Insted-A-Led*

*Micro Max  
Cool Aid  
Ultrafinish*

*Saftee Cut  
Thread Cut Cutting Oils*

*White Kut Soluble Oils  
Clean Wheel Coolants  
Cost Cut Synthetic Coolants*

*Saw Cut #683  
Delta #900 Coolants  
XP Rust Preventives*

*Saver Chain & Cable Fluid  
Way Oil  
Hydraulic Oil*

*Spindle Oil  
Compressor Oil  
Grease*

*Synthetic Gear Oil  
Synthetic Hydraulic Oil*


**Made In U.S.A.**

**Mullen Circle Brand, Inc.  
EEZ Products Division**

3514 West Touhy Ave  
Skokie, IL 60076  
847/676-1880

Fax: 847/676-3748

**Solutions@MullenOil.com**

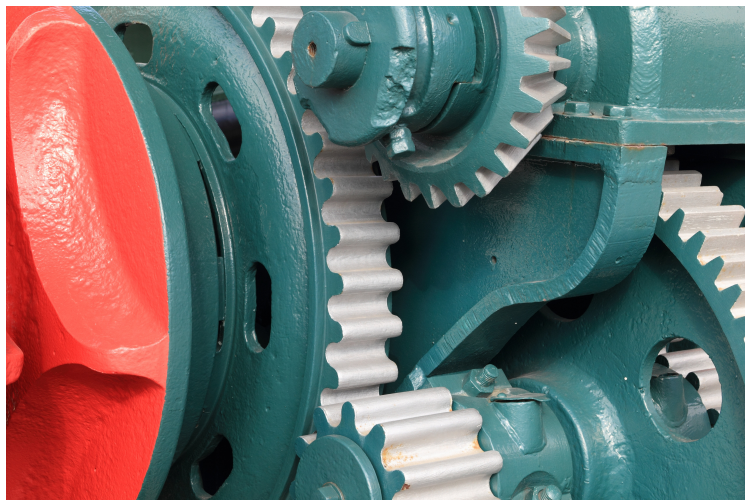

### *High Lubricity, Low Odor Offers Exceptional Performance*

**AGMA EP Gear Oils** offer high performance lubricity for use on all types of industrial steel and bronze gearing. The lighter grades may also be used to lubricate highly loaded bearings where common machine oils do not provide the necessary extreme pressure properties.

**AGMA EP Gear Oils** shown here are suitable for heavy duty, continuous operation as well as instantaneous shock loading. Combined with excellent rust protection and antifoam properties, these oils offer distinct operating advantages to the user.

*More ==>*

**...Providing Solutions To Industry Since 1912...**

# Mullen Circle Brand, Inc.

## EEZ PRODUCTS DIVISION

3514 W. Touhy Avenue  
Skokie, IL 60076

Phone 847/676-1880

Fax 847/676-3748

[Solutions@MullenOil.com](mailto:Solutions@MullenOil.com)

## EEZ PRODUCTS AGMA EP GEAR OILS

	#2EP	#3EP	#4EP	#5EP	#6EP	#7EP	#8EP	#8AEP
<b>Viscosity, SUS 100 F</b>	353	520	750	1150	1673	2404	3554	5227
<b>ISO Grade</b>	68	100	150	220	320	460	680	1000
<b>AGMA Grade</b>	2	3	4	5	6	7	8	8A
<b>SAE Grade</b>	80W	80W	80W	90	90	140	140	250
<b>Color</b>	Gold	Gold	Amber	Amber	Amber	Dark	Dark	Dark
<b>Odor</b>	Mild Oil	Mild Oil	Mild Oil	Mild Oil	Mild Oil	Mild Oil	Mild Oil	Mild Oil
<b>Flash Point, F</b>	400	400	400	400	400	460	460	460
<b>Pounds/Gallon</b>	7.43	7.56	7.65	7.67	7.68	7.69	7.70	7.71
<b>Timken Test, Lbs Pass</b>	65	65	65	65	65	65	65	65
<b>FZG Test, Stages Pass</b>	13	13	13	13	13	13	13	13
<b>4 Ball EP, ASTM D-2783</b>								
Weld Point, Kg	400	400	400	400	400	400	400	400
Load Wear Index	66.5	66.5	66.5	66.5	66.5	66.5	66.5	66.5
<b>4 Ball Wear ASTM D-2266</b>								
1800 rpm, 20 Kg	.33	.33	.33	.33	.33	.33	.33	.33
<b>Copper Corrosion</b> (3 Hrs @ 210 F)		None	None	None	None	None	None	None
<b>USS 224</b>	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass

### \*\*\*\*\* Cross Reference \*\*\*\*\*

#2 EP Gear Oil = Mobilgear 626

#3 EP Gear Oil = Mobilgear 627

#4 EP Gear Oil = Mobilgear 629

#5 EP Gear Oil = Mobilgear 630

#6 EP Gear Oil = Mobilgear 632

#7 EP Gear Oil = Mobilgear 634

#8 EP Gear Oil = Mobilgear 636

*...Providing Solutions To Industry Since 1912...*

**Cutting Fluids \* Industrial Lubricants \* Greases \* Cleaners**

The Information Given Herein Is Believed To Be Reliable, But No Guarantee Is Made Nor Liability Assumed.